



GOVT. APPROVED CIVIL, EHV - HT - LT ELECTRICALS.
TELECOM WORKS & LABOUR CONTRACTORS

Tel. : (0288) 2555750
M. : 97129 09040, 93774 58805
E-mail : excel19680@rediffmail.com
excel19680@gmail.com

116, Siddhnath Complex,
1st Floor, Near Indian Bank,
K. V. Road, Jamnagar-361001

TAX INVOICE							
ORIGINAL FOR RECIPIENT							
Excel Electrical 116, Siddhnath Complex, 1st Floor, Near Indian Bank, K.V. Road, Jamnagar-361001					NA		
TO,					Invoice No	JAN/22-23/05	
Reliance Projects And Property Management Services Limited					Date	1-Jan-23	
First Floor 101, Saffron, Panchwati 5 Rasta, Nr Bank of Baroda, Ambawadi, Ahmedabad- Gujarat- 380006					Contract- WO No.	P21/630221381	
					Route Name	NA	
					Site ID	As Par Abstract	
					Site Name	As Par Abstract	
					Vendor Code	399452	
					Supplier's PAN No.	AADFE1348L	
					Supplier's GSTIN	24AADFE1348L1ZJ	
State - State Code as per GST : GUJARAT - 24					Period of Supply	16/12/2022 to 18/12/2022	
GSTIN / Unique ID : 24AAJCR6636B1ZJ					Nature of Supply	5G RTP ELE. WORK	
PAN No. : AAJCR6636B					Place of supply of	GUJARAT	
Sr.	SAC : Code	Service Description	Qty (A)	UOM	Rate (Rs. / UoM) (B)	Amount (Rs.) (A*B*C)	
1	998734	[3362871] CHRG ELE RTP 5GNDG ODC D<2M AD C F DCDB	1.00	EA	50,879.00	50,879.00	
2	998734	[3200123] CHRG:S/F:4POLE,100AMPS ELCB	1.00	EA	3,800.00	3,800.00	
3	998734	[3342265] CHRG TRANSPORT-UPTO 50KM-SCV-1 SITE MATL	1.00	EA	2,086.00	2,086.00	
Total Supply Value of Milestone (Basic Value)						56,765.00	
Less : Basic value of Advance Paid with Service Tax							
Balance Invoice Value (Net off Advance paid with Tax)						56,765.00	
Central GST @ 9%						5,108.85	
State GST @ 9%						5,108.85	
Total GST Payable on Balance Invoice Value (Net off Advance paid with Service Tax)						10,217.70	
Total Invoice Value with GST						66,982.70	
Less - Advance paid without Service Tax							
Net Payable Amount						66,982.70	
Round Off Net Amount						66,983.00	
Amount in Words :- Sixty Six Thousand Nine Hundred Eighty Three Rupees Only							
GST Amount in Words :- Ten Thousand Two Hundred Seventeen Rupees & Seventy Paise							
For:- Excel Electricals PARESHBHAI BHIMJIBHAI LUNAGARIYA Digitally signed by PARESHBHAI BHIMJIBHAI LUNAGARIYA Date: 2023.01.17 16:03:45 +05'30' Authorised Signatory							
Declaration:							
a) Certified that all the particulars given above are true and correct.							



GOVT. APPROVED CIVIL, EHV - HT - LT ELECTRICALS.
TELECOM WORKS & LABOUR CONTRACTORS

Tel. : (0288) 2555750
M. : 97129 09040, 93774 58805
E-mail : excel19680@rediffmail.com
excel19680@gmail.com

116, Siddhnath Complex,
1st Floor, Near Indian Bank,
K. V. Road, Jamnagar-361001

NO CLAIM CERTIFICATE

WO/Contract Order and Frame Order no : P21/630221381

WO/Contract Order and Frame Order Date: 18/11/2022

Circle/State : North Gujarat

Site Name :-As Per Attached BOQ

Scope of Work :- 5G RTP ELE. WORK

Invoice no :- JAN/22-23/05

Invoice Date :- 01-01-2023

We hereby confirm that we have carried out above scope of work in accordance with the, w.o/Contract order and Frame Order scope, terms and instruction of EIC and RS/- (66,983=00) (Sixty Six Thousand Nine Hundred Eighty Three Rupees Only) as our final claim. We confirm that there is no further claim by us in respect of the above invoice site & the mention scope of work. The invoice amount will be paid 95% and balance 5% kept as retention and will be paid after defect liability period as per WO/Contract Order and Frame Order terms.

For M/s EXCEL ELECTRICALS

For, EXCEL ELECTRICALS

AUTH. SIGN.

Authorized Signatory

BOQ ELECTRICAL / SITE I.D. WISE ABSTRACT SHEET													
1 Contractor Name:		EXCEL ELECTRICALS											
2 Invoice No.:		JAN/22-23/05											
3 Invoice Dt.:		1-Jan-23											
4 WO No.:		P21/630221381											
5 Service Period From Date:		14-Dec-22											
6 Service Period To Date:		16-Dec-22											
		Technical Parameter											
Sr.	Site ID	WBS ID	Tower Type	NON KTD	Building Height	Tower Height	Wind Speed	CHRG TRANSPORT- UPTO 50KM-SCV-1 SITE MATL	CHRG ELE RTP 5GNDG ODC D<2M AD C F DCDB	CHRG-S/F:4POLE,10 0AMPS ELCB	Total Amount		
1	I-GJ-AMBD-ENB-0886	I-GJ-AMBD-GNB-0886	RTP	YES	G+4	6M	39	2,086.00	50,879.00	3,800.00	56,765.00		
		Total Abstract Value						2,086.00	50,879.00	3,800.00	56,765.00		
CONTRACTOR		MPCM/PMO							QSD		CPH		
Name		Name							Name		Name		
Sign		Sign							Sign		Sign		
Stamp		Stamp							Stamp		Stamp		
Date		Date							Date		Date		
For, EXCEL ELECTRICALS		P. PANDEY							EC No.: 10081519				
AUTH. SIGN.													


SHASHANK MISHRA
 EC No.: 10081519
 MAST ENGINEER
 Mo: 8849372357
MPCM - AHMEDABAD

Quantity Certification Summary (QCS)

WO No: P21/630221381

WO Date: 18/11/2022

Site ID Count: -AS PER BELOW MENTION

This is to certify that following Sites along with Technical Parameter pertaining to **ODESC** for above mentioned Work Order and of **M/s. EXCEL ELECTRICALS** being invoiced as per details attached, has been completed the following works.

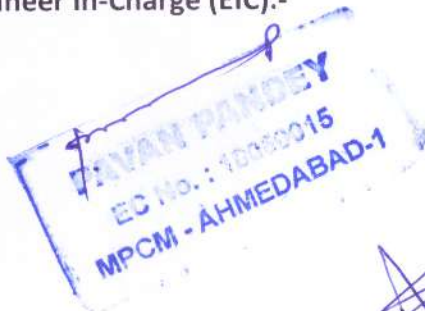
A) ELECTRICAL WORK:- 5G RTT/RTP SITES

Site ID	WBS ID	Technical Parameter			
		Tower Type	KIT/NKIT	Building Height	Wind Speed
I-GJ-AMBD-ENB-0886	I-GJ-AMBD-GNB-0886	RTP	NKD	G+3	39 M/s

Certified By:-

Engineer In-Charge (EIC):-

Circle Project Head (CPH):-



For, EXCEL ELECTRICALS

AUTH. SIGN.

SHASHANK MISHRA
EC No. : 10081519
MAST ENGINEER
Mo. 9849372357



Work Completion Certificate

State	Gujarat			Maintenance Point	Ahmedabad-1		
Project Type	93 K ☐	Infill ☐	Growth ☐	Other (Specify)	☒		
Site Type	Own Built ☒	IP Colo ☐	RP1 ☐	BSNL ☐	MAG1 ☐	NLD AG1 ☐	
Tower type	GBT ☐	RTT ☐	RTP ☒	GBM ☐	NBT ☐	Other (Specify) _____	

This is to certify that work has been completed as per specification given in workorder on the sites mentioned

The required ITP / Checklists are available and verified in system

Site I.D.

I-GJ-AMBD-ENB-0886

NEW SAP ID

I-GJ-AMBD-ENB-0886

W.O.Number

P21/630221381

Vendor Name

M/S. EXCEL ELECTRICALS

No of Sites

1

Completion Date

16-Dec-22

Vendor Representative

Name

Sign

Date

For, EXCEL ELECTRICALS

AUTH. SIGN. Date

RJIL Representative

Name

Sign

Date

RAVAN PANDEY
EC No. : 10000015
MPCM - AHMEDABAD-1

Remarks, if any:

Note :

In case of Multiple sites, please attach applicable site details with this certificate

SHASHANK MISHRA
EC No.: 10081519
MAST ENGINEER
Mo: 8849372357

EXCEL ELECTRICALS

5G RTP Electrical Quantity Measurement Sheet

SAP ID : I-GJ-AMBD-ENB-0886		Vendor Name:-Excel Electricals				
TOWER HEIGHT:- RTP		Opco Name:- Reliance -5G				
District:- Ahmedabad-1		Wo No :-P21/630221381				
Circle Name:- Gujarat North						
NO	Item Code	Item	Description	Quantity	UOM	Total
10	3342265	CHRG TRANSPORT-UPTO 50KM-SCV-1 SITE MATL	Transportation Charges for Free Issue Material (FIM) from W/H to the Site with SCV (Pickup or equivalent) Charges are inclusive of Loading, Unloading, handling, Toll, etc. #This Service Code is applicable when Material of only One Site is carried in One Trip # (Rate per Site basis)	1.00	EA	1.00
40	3362871	CHRG ELE RTP 5GNDG ODC D<2M AD C F DCDB	Charges are for providing material and services for execution of electrical work (excluding SMPS and battery installation) for 5G infra upgradation work at Roof Top Pole (RTP) NON-DG (NDG) sites having ODC platform at roof top and distance(D.) between existing ODC and new ODC is upto 2m. with additional cable required for DCDB charging in 5G ODC. The scope of the work includes supply, installation, and termination/glanding of earthing cables and power cables, installation and anchoring of ODC at platform, installation of ODC jointing kit and inter ODC conduit, supply and installation of cable trays and bends for cable trays etc. The site work shall be completed in all respects as per approved drawings, specifications, scope of work, and as per directions of Engineer in Charge.	1.00	EA	1.00
30	3200123	CHRG:S/F:4POLE,100AMPS ELCB	ELCB 100A 4P (100mA/300mA).	1.00	EA	1.00
EXCEL ELECTRICALS			FIELD ENGINEER	MPCM/PMO		
For, EXCEL ELECTRICALS		Name :- SHASHANK MISHRA		Name :-		
Signature :-		Signature :-		Signature :-		
Date :-		Date :- 12/01/2022		Date :-		
AUTH. SIGN.		MAST ENGINEER		EC No.: 10081519		
		Mo:8849372357		EC No.: 10081519		

MPCM - AHMEDABAD-1

EXCEL ELECTRICALS

5G RTP Electrical Quantity Abstract Sheet

SAP ID : I-GJ-AMBD-ENB-0886			Vendor Name:-Excel Electricals			
TOWER HEIGHT:- RTP			Opco Name:- Reliance -5G			
District:- Ahmedabad-1			Wo No :-P21/630221381			
Circle Name:- Gujarat North						
NO	Item Code	Item	Description	Quantity	UNIT RATE	Amount
10	3342265	CHRG TRANSPORT-UP TO 50KM-SCV-1 SITE MATL	Transportation Charges for Free Issue Material (FIM) from W/H to the Site with SCV (Pickup or equivalent)#Charges are inclusive of Loading, Unloading, handling, Toll, etc.#This Service Code is applicable when Material of only One Site is carried in One Trip #(Rate per Site basis)	1.00	2086.00	2086.00
40	3362871	CHRG ELE RTP 5GNDG ODC D<2M AD C F DCDB	Charges are for providing material and services for execution of electrical work (excluding SMPS and battery installation) for 5G infra upgradation work at Roof Top Pole (RTP) NON-DG (NDG) sites having ODC platform at roof top and distance(D.) between existing ODC and new ODC is upto 2m. with additional cable required for DCDB charging in 5G ODC. The scope of the work includes supply, installation, and termination/glanding of earthing cables and power cables, installation and anchoring of ODC at platform, installation of ODC jointing kit and inter ODC conduit, supply and installation of cable trays and bends for cable trays etc.The site work shall be completed in all respects as per approved drawings, specifications, scope of work, and as per directions of	1.00	50879.00	50879.00
30	3200123	CHRG:S/F:4POLE,100AMPS ELCB	ELCB 100A 4P (100mA/300mA).	1.00	3800.00	3800.00
						56,765.00
			CPH			
EXCEL ELECTRICALS For, EXCEL ELECTRICALS			MPCM/PMO			
Name :-			Name :-			
Signature :-			Signature :-			
Date :-			Date :-			


PAWAN PANDEY
 EC No.: 10000015
MPCM - AHMEDABAD-1

SHASHANK MISHRA
 EC No.: 10081519
 MAST ENGINEER
 Mo:8849372357

[illegible]

For, EXCEL ELECTRICALS

AUTH. SIGN.

Electrical Work

Site Information	
Sap Id	I-GJ-AMBD-ENB-0886 (5G Upgradation)
Candidate Id	C1
Form No	R5G-70-CQM-FMT-PR-013
Site Name	Sankalp Co Op Ho Soc Ltd Shankar Nagar Soc Nava Wadaj Ahmedabad
Site Location	Sankalp Co Op Ho Soc Ltd Shankar Nagar Soc Nava Wadaj Ahmedabad,AHMEDABAD,Gujarat
City	AHMEDABAD
Latitude	23.063510
Longitude	72.561298
R4G State	Gujarat
Contractor	Excel Electrical
Date	08 December 2022

For, EXCEL ELECTRICALS


AUTH. SIGN.

Inspection Report- Electrical Work

Sr.No.	Description	Specifications	Observations	Remarks
Preliminary Checks				
1.0	Drawing No		500070-E51-XX-XXXX-XXXX-ENB-0000-001	
1.1	Availability of SLD / Equipment layout with contactor	Latest Drawing	Yes	
1.2	Availability of all equipments/ Material on site	All tools & Tackles	Yes	
1.3	Any physical damages to the equipments	No damage	No	
1.4.1	Check for Make		EMERSION	
1.4.2	Model		NA	
1.4.3	Sr. no.		NA	
1.4.4	Rating of the equipments and cable		bonton	
1.4.1.1	Power Cable (KWH Meter to SMPS) Make		8kw	
1.4.1.2	Power Cable (KWH Meter to SMPS) Size		4c35sqmm	
1.4.2.1	SMPS with ACDB and DCDB- Make	Make	EMERSION	

For, EXCEL ELECTRICALS


AUTH. SIGN.

1.4.2.2	SMPS with ACDB and DCDB-Model	Model	NA	
1.4.2.3	SMPS with ACDB and DCDB-Rating	Rating	25aamp	
1.4.2.4	SMPS with ACDB and DCDB-Sr. No	Sr. No	NA	
1.4.3.1	Battery Bank-Make	Make	EXICOM	
1.4.3.2	Battery Bank-Model	Model	NA	
1.4.3.3	Battery Bank-Rating	Rating	100ah	
1.4.3.4	Battery Bank-Sr No for Module 1	Sr. No. Module 1	NA	
1.4.3.5	Battery Bank-Sr No for Module 2	Sr. No. Module 2	AN	
1.4.4.1	Energy Meter-Make	Make	NA	
1.4.4.2	Energy Meter-Model	Model	NA	
1.4.5.1	ODC / Equipment Rack (2 Bay)	2 Bay Make	1 bay odc	
1.4.5.2	ODC / Equipment Rack (3 Bay)	Make 3 Bay	NA	
1.4.6.1	Fiber Distribution Panel (96 F)	96 F- Make & Nos	NA	
1.4.6.2	Fiber Distribution Panel (288 F)	288 F- Make & Nos	NA	

Cable Connection and Routing

For, EXCEL ELECTRICALS


AUTH. SIGN.

2.1	Check all equipments are installed at proper location as per layout drawing	As per Drawing	Ok	
2.2	Check for connection of equipments as per SLD	As per Drawing	Ok	
2.3	Check for power cable termination at MCB with proper rating	As per Drawing	Ok	
2.4	Check Lugs fixed properly, by crimping tool		Ok	
2.5	Check MCB rating	As per Drawing	Ok	
2.6	Check cable cuts, damages, routing. (Cable should not be routed on sharp edges)	Routed properly and no damages	Ok	
2.7	Check for proper mounting of Meter Box and KWH Meter	Mounted properly	Ok	
2.8.1	AC power cable routed properly	Routed properly	Ok	
2.8.2	Trenching is done properly per site design layout & spec	no damages	Ok	
2.9	Check proper earthing of ODC / Equipment Rack	As per drawing	Ok	
2.10	Check proper earthing of all the equipments	As per drawing	Ok	
2.11	Check for cable entry points for proper sealing, conduit and gland	Properly Sealed	Ok	
2.12	No intermittent cable joint		Ok	
2.13	Check for labeling (Furling) of all the cable	Labeling Done	Yes	

2.14	Check connectors are properly fixed		Yes	
2.15	Check the continuity & tightness of cabling		Ok	
2.16	Check the positions of all switches and MCB	All in OFF condition	Yes	

Battery Bank (As per Battery Statement)

3.1	Setting & Installation as per OEM specifications	As per vendor user manual	Yes	
3.2	Battery Voltage	V	54	
3.3	Condition of Battery Bank	No leakages, Bulging	Ok	
3.4	Batteries are interconnected and connected to SMPS with correct polarity	Parallel Connections	Ok	
3.5	Battery terminals are properly tightened	No Loose Connection	Yes	
3.6	Grounding of battery bank done properly		Yes	
3.7	Battery commissioned Properly		Yes	
3.8	All Software®'s are uploaded as per HOTO Document guidelines	Latest Software Version	Yes	

SMPS with ACDB and DCDB

4.1	Check for SMPS Rated Capacity	12 KW, 16 KW	8	
4.2	No. of modules installed and rating in SMPS	2,3 and 4 KW / 3 KW	2	

For, EXCEL ELECTRICALS


 AUTH. SIGN.

4.3	Check for Battery low voltage disconnect setting	41 V	41	
4.4	Check for proper & Firm connection of all cables	No Loose Connection	Ok	
4.5	Check for Earthing of SMPS	As per drawing	Ok	
4.6	Check for functioning of all indication lamps and Meters on SMPS	All functioning	Yes	
4.7	SMPS commissioned Properly		Yes	
4.8	All Software's are uploaded as per HOTO Document guidelines	Latest Software Version	Yes	
4.9	Check for connection and Integration of all External alarms.	Alarms connected & Simulated	Yes	


Cable Tray

5.1	Check for routing and saddling of cable tray	Proper Saddle/ Clits used	Yes	
5.2	Check for fixing of cable tray cover with the cable tray	As per Drawing	Ok	
5.3	Check for proper arrangement of vertical supports for cable tray	As per Drawing	Ok	

ODC

6.1	Check for ODC accessories availability as per BOM	Available and no parts are missing	Yes	
6.2	Check for the foundation dimensions as per drawing and foundation level	As per drawing	Yes	
6.3.1	Check for Anchoring Type (R4G-70-TWC-GEN-PR-002)	Chemical Anchor	Yes	

For, EXCEL ELECTRICALS


AUTH. SIGN.

6.3.2	Check for Anchor make and Size Check for Anchor Adhesive	HILTI / FIECHER- M10 HILTI / FIECHER	hilti	
6.3.3	Check for Torque on random basis	30 N /m	30n.m	
6.4	Surface paint quality & scratches / Dents / transit / corrosion damages	No abnormal sign of: scratches / paint peel off / dent / corrosion	ok	
6.5	Cabinet installation as per approved drawing	As per drawing and specification	Yes	
6.6	PG glands and Roxtec cable entry modules	Present and No damages	ok	
6.7	Protection from Moisture / Water ingression through EPDM rubber gasket is proper	Availability of Gasket	ok	
6.8	Check for no gap between EDPM rubber gasket and roof panels to minimize the entry of driven water	No Gap	ok	
6.9	Cabinet door provided with Hinged type , proper alignment and locking arrangement	Proper Alignment	Yes	
6.10	Check for the proper mounting of Fan Trays and functioning	Noise Free Operation	Ok	
6.11	Rain hood installed above cable entry modules / PG Glands	Available	Yes	
6.12	Cable entry between racks through rubber Grommets	Provided	Yes	
6.13	ODC enclosure is properly earthed	Proper Earthing	Yes	
Other Equipments				
7.1	Check for Proper Installation of Lightening Arrestor		Yes	

For, EXCEL ELECTRICALS


AUTH. SIGN.

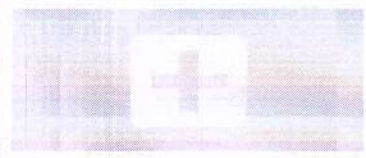
7.2	Aviation Lamp(If Applicable)	Installed	Yes	
7.3	Check for installation of MCT (Rextec Module) on GBM and Numbers	Installed & 2	Yes	
7.4	Check for pole/delta and ODC earthing	As per drawing	Yes	
7.5	Are all necessary cables routed up to the antenna?	As per drawing	Yes	

Observations and Comments:

ok

For, EXCEL ELECTRICALS


AUTH. SIGN.

CFQ details			
	Contractor's representative	Field Engineer	QC Engineer
Signature			
Name	bhavesh	shashank	
Date	08 December 2022	08 December 2022	--

For, EXCEL ELECTRICALS


AUTH. SIGN.

Contractor Name : M/s. Excel Electricals

Circle Name : Gujarat North

Site ID & Name : I-GJ-AMBD-ENB-0886

Site Count Billed : 01

WO No. : 630221381

Invoice No. : JAN/22-23/05

Invoice Date: 01-Jan-23

A	B	C	D	E	F	G	H	I	J	K
Material No	Material Description	UOM	Material Received from WH	Received BTN (IN)	Transfer BTN (OUT)	Material Return To WH (MRN)	Consumed & Invoiced Earlier	Consumed & Invoiced Currently	Total Consumption Till Date	Balance with Contractor / WIP
2001931289	PIPE PVC, 33.1MM OD 33.1MM 6.6MM	EA	0	3	0	0	0	1	1	2
2001966070	MCT FITTINGS,W/GI CONDUITS,F CSS-MAG1	EA	0	4	0	0	0	2	2	2
2002249327	SINGL BAY ODC, 42U FOR 5G, MAXBROS	EA	0	2	0	0	0	1	1	1

Remarks If Any:-

>Material Net issuance verified by Material Coordinator(Column NO- "D" TO "G".)

>Site ID, Inv No + Previous and current bill quantities booking verify by MPCM/PMO

Verified & Signed By:-

MPCM :-

Material Coordinator:-

Contractor :-


PAWAN PANDEY
 EC No.: 10080016
 MPCM - AHMEDABD


Akash Gandhi
 Circle Mast Material Coordinator
 Gujarat North
 Mobile No. 8320896526

For, EXCEL ELECTRICALS

AUTH. SIGN.


SHASHANK MISHRA
 EC No.: 10081519
 MAST ENGINEER
 Mo:8849372357

Site Wise Consumption				
Contractor Name : M/s. Excel Electricals Circle Name : Gujarat North Site Count in Contract : I-GJ-AMBD-ENB-0886 Site Count Billed : 01		WO No. : 630221381 Invoice No. : JAN/22-23/05 Invoice Date: 01-JAN-2023		
Material No	Material Description	UOM	I-GJ-AMBD-ENB-0886	Total
2001931289	PIPE PVC, 33.1MM OD 33.1MM 6.6MM	M	1	1
2001966070	MCT FITTINGS,W/GI CONDUITS,F CSS-MAG1	ST	2	2
2002249327	SINGL BAY ODC, 42U FOR 5G, MAXBROS	EA	1	1
Remarks If Any :-				
>Material Net issuance verified by Material Coordinator >Site wise consumption QTY verify by MPCM/PMO.				
Verified & Signed By :-		Contractor :-		
MPCM:-  PAVAN PANDEY EC No. : 10060015 MPCM - AHMEDABAD		Material Coordinator:- :-  Akash Gandhi Circle Mast Material Coordinator Gujarat North Mobile No. 8320896526		
		For, EXCEL ELECTRICALS  AUTH. SIGN.		


SHASHANK MISHRA
 EC No. : 10081519
 MAST ENGINEER
 Mo:8849372357

Ref. No.


Date :

This is to inform and certify that **M/S. Excel Electricals** will not be deploying 20 or more contract workmen/labour on any day during the execution of the contract work in the allotted vide Work Order No. P21/630221381

However, in future, if ever the number of contract workmen to be deployed exceeds the stipulated statutory number of 20 or more workmen, the contractor will immediately apply and obtain labour license for the required capacity from the concerned Licensing Authority under CL(R&A) Act, 1970/Central Rules, 1971.

Thanking You,

For, EXCEL ELECTRICALS



AUTH. SIGN.



GOVT. APPROVED CIVIL, EHV, HT, LT ELECTRICALS,
TELECOM WORKS & LABOUR CONTRACTORS

Ref. No.

Tel. : (0288) 2555750
M. : 97129 09040, 93774 58805
E-mail: excel19680@gmail.com
excel19680@rediffmail.com

116, Siddhnath Complex,
1st Floor, Near Indian Bank,
K. V. Road, Jamnagar - 361 001

Date :

To,

Reliance Projects and Property Management Services Limited
5, TTS Industrial Area, Thane Belapur Road,
Ghansoli, Navi Mumbai - 400701

I/We/M/s. EXCEL ELECTRICALS. Hereby declare that we will not engage any child labour or Inter State Migrant Workmen on any day during the period of contract in the establishment of **M/s Reliance Digital Platform & Project Services Limited** for execution of the work awarded to us vide WO No. **P21/630221381**

We hereby indemnify M/s Reliance Corporate IT Park Limited against any legal hassles arising due to lapses on our part under **The Child Labour (Prohibition & Regulation) Act 1986 and Inter State Migrant Workmen (Regulation of Employment and Conditions of Services) Act, 1979.**

Thanking You,

(Authorized Signatory)

For, EXCEL ELECTRICALS


AUTH. SIGN.

Serial No. 454/202

23-9-21



सत्यमेव जयते

INDIA NON JUDICIAL NOTARY

Government of Gujarat

Certificate of Stamp Duty

Certificate No. : IN-GJ26100522199170T
Certificate Issued Date : 23-Sep-2021 05:36 PM
Account Reference : IMPACC (AC)/ gj13336711/ GULBAI TEKRA/ GJ-AH
Unique Doc. Reference : SUBIN-GJGJ1333671186961021756150T
Purchased by : EXCEL ELECTRICAL
Description of Document : Article 14 Bond
Description : Not Applicable
Consideration Price (Rs.) : 0
(Zero)
First Party : EXCEL ELECTRICAL
Second Party : Not Applicable
Stamp Duty Paid By : EXCEL ELECTRICAL
Stamp Duty Amount(Rs.) : 500
(Five Hundred only)



Abuzar

KC 0015322762

For, EXCEL ELECTRICALS

AUTH. SIGN.

P131

Last Updationon :25.11.16

DECLARATION CUM INDEMNITY BOND


THIS DECLARATION CUM INDEMNITY BOND made at by M/s Excel Electrical their registered Office at **116, Siddhnath Complex, K.V. Road, Near Indian Bank, Jamnagar-361001** (hereinafter referred to as “**Contractor**” which expression shall unless it be repugnant to the context or meaning thereof, be deemed to mean and include their respective assigns, successors, executors and/or administrators) of the ONE PART in favor of the Company M/s. **Reliance Projects And Property Management Service Limited**

Registered under the Companies Act, 1956, and having its registered office at **Auda TP Scheme, Bodakdev No 1/A F P No.5 2nd Floor, Opp. Drive-in Cinema, Drive-in Road Ahemdabad-380054** (hereinafter referred to as the “**Company**”, which expression shall unless it be repugnant to the context or meaning thereof be deemed to mean and include its assigns, successors,) of the OTHER PART.

WHEREAS the Company has entered into a contract by issuing Work Order(s) to the Contractor for the

P21/54023589	P21/630132499	P21/630144520	P21/630144516
P21/630150017	P21/630150100	P21/630149196	P21/630149213
P21/630147145	P21/630143718	P21/630143719	P21/630152402
P21/630152403	P21/630150746	P21/630155636	P21/630155637
P21/630155650	P21/630155651	P21/630157110	P21/630157111
P21/630159071	P21/630159081	P21/630160651	P21/630160652
P21/630161205	P21/630162363	P21/630163207	P21/630163602
P21/630163292	P21/630163294	P21/630163603	P21/630163680
P21/630163207	P21/630162369	P21/630164228	P21/630164230
P21/630164338	P21/630164360	P21/630165881	P21/630165883
P21/630166047	P21/630166913	P21/630168426	P21/630168427
P21/630170776	P21/630169751	P21/630169585	P21/630169584
P21/630170205	P21/630170206	P21/630170809	P21/630170811
P21/630171733	P21/630173004	P21/630173001	P21/630172817
P21/630174759	P21/630174215	P21/630174208	P21/630173920
P21/630177304	P21/630177299	P21/630177208	P21/630177206
P21/630176190	P21/630174761	P21/630174759	P21/630177302
P21/630177300	P21/630179113	P21/630179110	P21/630178361
P21/630186317	P21/630186315	P21/630184297	P21/630180929
P21/630180926	P21/630180228	P21/630195709	P21/630195708
P21/630195706	P21/630195705	P21/630195703	P21/630194522
P21/630191437	P21/630191436	P21/630188716	P21/630188720
P21/630187840	P21/630186905	P21/630186908	

For, EXCEL ELECTRICALS


AUTH. SIGN.

(Hereinafter called the “**Contract**”)

P131

Last Updationon :25.11.16

(Hereinafter called the "**Contract**")

AND WHEREAS it is one of these essential conditions of the Contract that the Contractor shall comply with all the provisions of the Labor & Industrial Laws, as may be applicable from time to time for the discharge and completion of the Works and/or Services covered under said Contract by the Contractor including but not limited to the observance and compliance of The Contract Labor (R & A) Act 1970, Child Labor (Prohibition and Regulation) Act 1986, The Employees Provident Funds & Miscellaneous Provisions Act, 1952, Employees State Insurance Act 1948, Minimum Wages Act, 1948, Payment of Bonus Act, 1965, Payment of Wages Act, 1936, Employees Compensation Act.1923, and other Labor Laws applicable to the contractor (hereinafter referred as the '**Laws**').

AND WHEREAS the Contractor has agreed to execute this Declaration cum Indemnity Bond to this effect and has agreed to indemnify and keep the Company, its directors and employees and representatives indemnified and hold harmless against all third party claims, charges, penalties, fines, expenses, losses, damages, costs, suits or any other levy against the Company and/or the management due to the failure of the Contractor to observe or follow any Laws.

NOW THIS DEED WITNESSETH AS UNDER:

1. In consideration of the Company awarding the Contract/ Work Order to the Contractor subject to the condition of execution of this Declaration cum Indemnity bond, the Contractor declares and represents to the Company that the Contractor has obtained all statutory registrations, certificates, licenses and approvals required under the Laws enabling the Contractor to execute the Contract in a legal and lawful manner.
2. That in the event of any liability arising out of non-compliance of any such 'Laws' by the Contractor in connection with the execution of the Contract, the Contractor shall bear all the resultant whatsoever liability(IES), if any arising out thereof and that the Company, its directors, employees, representatives, shall not be liable for any such liability(IES). The Contractor agrees to indemnify and keep the Company and its directors, employees, representatives indemnified, defend and hold harmless, against all losses, costs, damages, claims, penalties, interest, expenses, demands, fines, legal liability, causes of action, injury to persons suites which may be suffered, incurred, undergone and / or sustained by the Company including the costs and expenses that may be incurred in defending any such liability(ies) claim(s), proceeding(s) etc. that may be made or taken or arise on the same by any person, body, authority, government, judicial / quasi-judicial authority due to the failure or noncompliance of any such laws and rules there under (including any amendments in acts, laws, statutes & rules there under) of whatsoever kind and nature arising out of or in any way connected with, whether or not such acts or omissions are actual or alleged, active or passive with regard to the discharge of the said Contract.
3. The Contractor hereby agrees and undertakes to make good any loss, damage, penalties, interests, claims, suits, demands, decrees, expenses that the Company may suffer to the fullest satisfaction of the Company and if the Contractor fails to make good the same then the Company shall have the right to recover the same and or any other loss sustained, without any restriction or limitation, together with any other incidental expenses, costs, and all incidental logistic expenses etc that may be suffered by the Company, from the Contractor.

For, EXCEL ELECTRICALS

AUTH. SIGN.

P131

Last Updationon :25.11.16

4. The Contractor hereby further confirms and declares that this Declaration cum Indemnity Bond is irrevocable and shall be final and binding on it / him heirs, executors, administrators, legal representatives, successors and assigns, wherever the context applies. Any claims, demands, shall be adjusted against any amount due and payable to the Contractor and the Company shall have the right to withhold any amounts due and payable to the Contractor, till the settlement of such claims, disputes to the satisfaction of the Company or alternatively make demand sufficient security from the Contractor towards discharge of such claims, obligations etc.
5. The Declaration cum Indemnity Bond shall be applicable for any and all Work Orders issued to the Contractor in this regard.
6. This Declaration cum indemnity bond shall be in accordance with the laws of India and any dispute between the parties with regard to this Declaration cum Indemnity Bond shall be resolved through the dispute resolution process mentioned in the General Conditions of the Contract (GCC).
7. Any terms used in this indemnity bond, but not expressly defined herein shall have the meaning assigned to it in the General terms and Conditions (GTC) forming part of the Work Orders issued.

IN WITNESS WHEREOF, the said Contractor has hereunto set their hand the day and year first hereinabove written.

SIGNED SEALED AND DELIVERED
By the within named "CONTRACTOR")

For, EXCEL ELECTRICALS

Chit

AUTH. SIGN.

(Authorized Signatory)
Rubber Stamp of Firm/Company
Name:
Designation:
Date:

Contractor

BEFORE ME

Signature

A. M. UJJAINI
NOTARY
GOVT. OF INDIA

23/9/21

For, EXCEL ELECTRICALS

Signature
AUTH. SIGN.



RELIANCE PROJECTS & PROPERTY MANAGEMENT SERVICES LIMITED

(FORMERLY RELIANCE DIGITAL PLATFORM & PROJECT SERVICES LTD)

AUDA TP SCHEME, BODAKDEV NO: 1/A,, F P NO.: 5, 2ND FLOOR,

OPP. DRIVE IN CINEMA, DRIVE IN ROAD, AHMEDABAD-380054, GUJARAT, INDIA

Telephone : +91 79 -8879387831/40014190

Email: SUNILKUMAR.LIMBACHIA@RIL.COM

**WORK ORDER**

To 399452 EXCEL ELECTRICALS 116, SIDDHNATH COMPLEX, K. V. ROAD, NR. INDIAN BANK JAMNAGAR GUJARAT Pin Code : 361001 INDIA Phone : +91-288-2555750 Fax : E-Mail : EXCEL19680@GMAIL.COM Attention : PARESH LUNAGARIYA	Work Order No. : P21/630221381 Date : 18.11.2022 Contractor's Quot. Ref : Date : Our Ref : 6011 GSTN Of Biller : 24AADFE1348L1ZJ Bill From State : Gujarat Bill From : 399452
--	---

This WORK ORDER, the SPECIAL CONDITIONS OF CONTRACT, the GENERAL CONDITIONS OF CONTRACT, the annexures enclosed to each of the foregoing, including any other document forming part of CONTRACT DOCUMENTS contain all the express terms and conditions of contract of supply of SERVICES ordered pursuant to this WORK ORDER and confirms and supersedes the LETTER OF COMMITMENT (if any) issued by COMPANY. CONTRACTOR agrees to supply the SERVICES, including all DELIVERABLES in full accordance with the foregoing terms and conditions. Capitalized terms used in this WORK ORDER but not defined in the WORK ORDER shall have the meaning ascribed to such terms in the foregoing SPECIAL CONDITIONS OF CONTRACT and GENERAL CONDITIONS OF CONTRACT. CONTRACTOR shall sign and return this WORK ORDER acknowledging the acceptance of this WORK ORDER within three (3) days of receipt at the communication address mentioned in this WORK ORDER. If acknowledgement is not received within three (3) days, this WORK ORDER will be deemed accepted by the CONTRACTOR. No other form of acceptance shall be binding on the PARTIES. For all future correspondence please quote this WORK ORDER NUMBER.

WO Period From DT : 18.11.2022 To DT : 28.02.2023	Value of Work CGST SGST	INR INR INR	414,505.00 37,305.45 37,305.45
TOTAL ORDER VALUE		INR	489,115.90
Value in Words : (Rs. Four Lakh Eighty Nine Thousand One Hundred Fifteen and Paise Ninety only) For other details, please refer line items.			
Delivery Terms : N/A . Engineer in Charge : Anil Shah			
Payment Terms : See Page Inside			
BUYER : Shah	for RELIANCE PROJECTS & PROPERTY MANAGEMENT SERVICES LIMITED (FORMERLY RELIANCE DIGITAL PLATFORM & PROJECT SERVICES LTD) Authorised Signatory	CONTRACTOR'S Acceptance Signature Title Date	

REGISTERED OFFICE : Office-101,Saffron, Nr.Centre Point Panchwati 5 Rasta, Ambawadi Ahmedabad -380006

TAJAN PANCHWATI
EC No.: 7870015
MPCM - AHMEDABAD-1

For, EXCEL ELECTRICALS
AUTH. SIGN.



WORK ORDER

W.O Number P21 / 630221381 Dt.18.11.2022
Page No: 2

No	Item Code	Material/Work Description	Quantity	UOM	Price Details	Unit Rate	Amount (INR)
2	I-GJ-AMBD-ENB-0886 I-GJ-AMBD-ENB-0857 I-GJ-AMBD-ENB-0145 I-GJ-AMBD-ENB-0800 I-GJ-AMBD-ENB-0273 I-GJ-AMBD-ENB-0275	ROOF TOP POLE 3 H FRAME ELE	1	EA			
					Value of Work	INR/AU	355,290.00
					CGST	9.00 %	31,976.10
					SGST	9.00 %	31,976.10
		Service Accounting Number:	998734				

The item covers the following Work :

10 3342265 CHRG TRANSPORT-UP TO 50KM-SCV-1 SITE MATL

6 EA - each
Net value of item 2,086.00
12,516.00

Transportation Charges for Free Issue Material (FIM) from W/H to the Site with SCV (Pickup or equivalent)#Charges are inclusive of Loading, Unloading, handling, Toll, etc.#This Service Code is applicable when Material of only One Site is carried in One Trip #Rate per Site basis)

20 3345131 S&I MCB TP63A+N100A F/5G INFRA UPGRADE

6 EA - each
Net value of item 1,213.00
7,278.00

Charges are for supply and installation of 3Pole 63A+ 1Npole 100A MCB for 5G infra upgradation work. The site work shall be completed in all respects as per approved drawings, specifications, scope of work, and as per directions of Engineer In Charge.

30 3200123 CHRG:S/F:4POLE,100AMPS ELCB

6 EA - each
Net value of item 3,800.00
22,800.00

40 3362871 CHRG ELE RTP 5GNDG ODC D<2M AD C F DCDB

6 EA - each
Net value of item 50,879.00
305,274.00

Charges are for providing material and services for execution of electrical work (excluding SMPS and battery installation) for 5G infra upgradation work at Roof Top Pole (RTP) NON-DG (NDG) sites having ODC platform at roof top and distance(D.) between existing ODC and new ODC is upto 2m. with additional cable required for DCDB charging in 5G ODC. The scope of the work includes supply, installation, and termination/glanding of earthing cables and power cables, installation and anchoring of ODC at platform, installation of ODC joining kit and inter ODC conduit, supply and installation of cable trays and bends for cable trays etc. The site work shall be completed in all respects as per approved drawings, specifications, scope of work, and as per directions of Engineer In Charge.

50 3349126 CHRG DE-INSTALLATION OF EXISTING CABLE

6 EA - each
Net value of item 1,237.00
7,422.00

Charges are for providing services to de-install existing electrical cables at any enodeB site and returning them back to RJLL warehouse. The scope of the work includes de-connection, de-installation, repacking of cables and returning them back to RJLL warehouse etc..The site work shall be completed in all respects as per approved drawings, specifications, scope of work, and as per directions of Engineer In Charge.

For, EXCEL ELECTRICALS

AUTH. SIGN.



WORK ORDER

W.O Number P21 / 630221381 Dt.18.11.2022
Page No: 3

Total Value of Work	INR	414,505.00
Total CGST	INR	37,305.45
Total SGST	INR	37,305.45

Total Order Value:	INR	489,115.90
--------------------	-----	------------

Terms of payment :

Payment shall be made as per Detailed Payment Terms specified in the purchasing document.

Vendor Bank Details:

Bank Account No. : 5291462239
Bank Name : CENTRAL BANK OF INDIA
City : JAMNAGAR

Liquidated Damages :

0.5 % PER WEEK TO MAX OF 5%

Engineer-In-charge :

Anil Shah
Ankur Shah
Chandrajeet Yadav
Girish Modi
Nayan Pandey
Nayan Patel
Rakesh Shah
Kamal Patel
Jignesh Bhayani
Satish Padhiyar
Kapil Gurubaxani
Alex Rao
Chirag Shah

Document Submission Bank:

Note(S): 1. It is essential that the Contractor shall mention ItemNo. & Item code along with corresponding Material/Work Description and W.O.No. as mentioned above, in the Delivery challan (On-Shore Order), Measurement sheet and invoice for ease of material Inwarding, Certification of work and Bill Processing. Failure to do so may be the grounds for the rejections(s) or delay in release of payment(s).

PLANT REGISTRATION NO. : 24AAJCR6636B1ZI

For, EXCEL ELECTRICALS

AUTH. SIGN.